



Administrator's Guide

Contents

Administrator's Guide	7
Using Web Config Network Configuration Software	8
About Web Config	8
Accessing Web Config	8
Restricting Features Available for Users	9
Changing the Administrator Password in Web Config	10
Locking the Settings	11
Disabling the External Interface	11
Updating Firmware Using Web Config	11
Using Your Product on a Secure Network	12
Encrypting the Password	13
Configuring SSL/TLS Communication	13
Configuring SSL/TLS Settings	13
Configuring a Server Certificate for the Product	14
Configuring IPsec/IP Filtering	15
About IPsec/IP Filtering	16
Configuring Default IPsec/IP Filtering Policy	16
Configuring Group IPsec/IP Filtering Policies	17
IPsec/IP Filtering Policy Settings	18
IPsec/IP Filtering Configuration Examples	22
Configuring an IPsec/IP Filtering Certificate	23
Configuring SNMPv3 Protocol Settings	24
SNMPv3 Settings	25
Connecting the Product to an IEEE 802.1X Network	25
Configuring an IEEE 802.1X Network	25
IEEE 802.1X Network Settings	26
Configuring a Certificate for an IEEE 802.1X Network	27
IEEE 802.1X Network Status	28
Using a Digital Certificate	29
About Digital Certification	29

Obtaining and Importing a CA-signed Certificate	30
CSR Setup Settings	32
CSR Import Settings	32
Deleting a CA-signed Certificate	33
Updating a Self-signed Certificate	34
Importing a CA Certificate	35
Deleting a CA Certificate	35
Configuring Protocols in Web Config	36
Protocol Settings	37
Using EpsonNet Config Network Configuration Software	41
Installing EpsonNet Config	41
Configuring a Product IP Address Using EpsonNet Config	41
Using Epson Device Admin Configuration Software	44
Solving Problems	45
Solving Network Software Usage Problems	45
Cannot Access Web Config	45
The "Certificate has expired" Message Appears	46
"The name of the security certificate does not match" Message Appears	46
Model Name or IP Address Not Displayed in EpsonNet Config	46
Solving Network Security Problems	46
Pre-Shared Key was Forgotten	47
Cannot Communicate with the Product Using IPsec Communication	47
Communication was Working, but Stopped	48
Cannot Create the Secure IPP Printing Port	48
Cannot Connect After Configuring IPsec/IP Filtering	48
Cannot Access the Product After Configuring IEEE 802.1X	48
Solving Digital Certificate Problems	49
Digital Certificate Warning Messages	49
Cannot Import a Digital Certificate	50
Cannot Update a Certificate or Create a CSR	51
Deleted a CA-signed Certificate	51
Where to Get Help	51

Notices	53
Trademarks	53
Copyright Notice.....	53
Copyright Attribution	54

Administrator's Guide

Welcome to the *Administrator's Guide*.

For a printable PDF copy of this guide, [click here](#).

You can use two software utilities to configure your product's advanced network settings: Web Config and EpsonNet Config. This guide covers Web Config in detail; for information on using EpsonNet Config, see the EpsonNet Config help utility.

The available network functions vary by product. (Unavailable functions are not displayed on the product's control panel or software settings screen.) Epson products support the following system administration functions:

- SSL/TLS communication: use Secure Sockets Layer/Transport Layer Security to encrypt traffic and avoid spoofing between the product and a computer
- IPsec/IP filtering: control access and secure communications between the product and a network gateway
- Individual protocol control: enable and disable single services
- Enable or disable direct connections via USB
- Import and export printer settings: migrate settings from product to product

Using Web Config Network Configuration Software

Follow the instructions in these sections to configure your product's administrator network settings using the Web Config software.

[About Web Config](#)

[Accessing Web Config](#)

[Restricting Features Available for Users](#)

[Updating Firmware Using Web Config](#)

[Using Your Product on a Secure Network](#)

About Web Config

Web Config is a browser-based application you can use to configure a product's settings. Basic and advanced setting pages are available.

Note: Before you can configure system administration settings, you must connect the product to a network. See the product's *User's Guide* for instructions.

You can lock the settings you select with the administrator password for your product. See the product's *User's Guide* for instructions.

Parent topic: [Using Web Config Network Configuration Software](#)


Accessing Web Config

You can access Web Config from your browser using HTTP or HTTPS.

By default, you access Web Config for the first time using HTTP. If you continue to use HTTP, Web Config will not display all available menus.

1. Print a network status sheet for your product and identify the product IP address. See the product's *User's Guide* for instructions.
2. Start your web browser and make sure JavaScript is enabled.
3. Type the product IP address into the browser as follows, depending on the protocol you are using:
 - IPv4: `http://product IP address`
 - IPv6: `http://[product IP address]/`

The Status page appears:

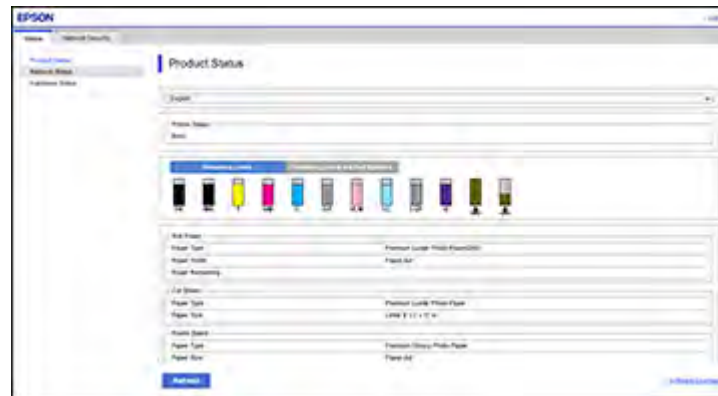

4. If you see a warning about the self-signed certificate, ignore the warning and continue to the product IP address. See your browser help for details.

Note: You can disable the HTTPS requirement, update the self-signed certificate, or import a CA (Certificate Authority) certificate to remove the warning message. See the links below for more information.

To access Web Config after configuring HTTPS, enter https:// before the product IP address, shown in step 3.

Note: If the product name is registered with the DNS server, you can use the product name instead of the product IP address to access Web Config.

Parent topic: [Using Web Config Network Configuration Software](#)

Related tasks

[Configuring SSL/TLS Settings](#)

[Obtaining and Importing a CA-signed Certificate](#)

[Updating a Self-signed Certificate](#)

Restricting Features Available for Users

Follow the instructions in these sections to restrict users from using certain product features using the administrator password and Web Config software.

[Changing the Administrator Password in Web Config](#)

[Locking the Settings](#)

[Disabling the External Interface](#)

Parent topic: [Using Web Config Network Configuration Software](#)

Changing the Administrator Password in Web Config

You can change the administrator password using your product's control panel, Web Config, or Epson Device Admin. You use the same administrator password in all cases.

Note: See your product's *User's Guide* for instructions on setting an administrator password using the control panel. If you forget your administrator password, contact Epson for support, as described in the product's *User's Guide*.

1. Access Web Config and select the **Product Security** tab.
2. Select **Change Administrator Password**.

You see a window like this:



3. Enter a user name, if necessary.
4. Enter the current password, then enter and confirm the new password in the fields provided.

Note: The default password is the product's serial number. Check the label on the back of the printer to locate the serial number. The default user name is blank.

5. Click **OK**.

Parent topic: [Restricting Features Available for Users](#)

Locking the Settings

With the administrator password, you can use the Web Config interface or the control panel to prevent non-administrators from changing some settings in the settings menu.

1. Access Web Config and log in using the administrator name and password.

Note: The default password is the product's serial number. Check the label on the back of the printer to locate the serial number. The default user name is blank.

2. Select **Device Management > Control Panel**.
3. Enable the **Panel Lock** setting and click **OK**.

If you want to disable **Lock Setting** from the control panel, tap the  icon in the top right corner of the home screen to log in as an administrator. The  icon does not appear on the home screen when **Lock Setting** is disabled.

Parent topic: [Restricting Features Available for Users](#)

Disabling the External Interface

You can restrict the ability to print using a USB connection by disabling the USB port.

1. Access Web Config and select **Product Security > External Interface**.
2. Select **PC Connection via USB** and do one of the following:
 - Select **Disable** to prevent USB connections
 - Select **Enable** to allow USB connections
3. Click **OK** to save your setting.


Parent topic: [Restricting Features Available for Users](#)

Updating Firmware Using Web Config

If your product is connected to the Internet, you can update the product firmware using Web Config.

1. Access Web Config and select **Device Management > Firmware Update**.

You see a window like this:

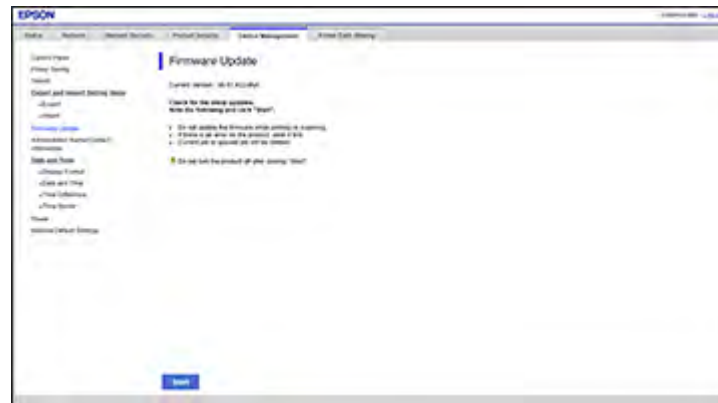

2. Click **Start** to check for the latest firmware.
3. If there is a firmware update, click **Start** to begin the update.

Note: Make sure the product is not in use and clear any errors on the LCD screen before starting the update.

Parent topic: [Using Web Config Network Configuration Software](#)

Using Your Product on a Secure Network

Follow the instructions in these sections to configure security features for your product on the network using the Web Config software.

[Encrypting the Password](#)

[Configuring SSL/TLS Communication](#)

[Configuring IPsec/IP Filtering](#)

[Configuring SNMPv3 Protocol Settings](#)

[Connecting the Product to an IEEE 802.1X Network](#)

[Using a Digital Certificate](#)

[Configuring Protocols in Web Config](#)

Parent topic: [Using Web Config Network Configuration Software](#)

Encrypting the Password

You can set up password encryption to protect confidential information stored in the product.

1. Access Web Config and log-in as an administrator.
2. Select **Product Security > Password Encryption**.
3. Select **On** to enable encryption.
4. Click **OK** to save your setting.

You can also enable password encryption from the product's control panel ( Menu > **General Settings > System Administration > Security Settings > Password Encryption**).

Parent topic: [Using Your Product on a Secure Network](#)

Configuring SSL/TLS Communication

Follow the instructions in these sections to configure SSL/TLS communication using Web Config.

[Configuring SSL/TLS Settings](#)

[Configuring a Server Certificate for the Product](#)

Parent topic: [Using Your Product on a Secure Network](#)

Configuring SSL/TLS Settings

If your product supports HTTPS, you can configure SSL/TLS to encrypt communications with your product.

1. Access Web Config and select the **Network Security** tab.
2. Under **SSL/TLS**, select **Basic**.

You see a window like this:



3. Select one of the options for the **Encryption Strength** setting.
4. Select **Enable** or **Disable** as the **Redirect HTTP to HTTPS** setting as necessary.
5. Click **Next**.
You see a confirmation message.
6. Click **OK**.


Parent topic: [Configuring SSL/TLS Communication](#)

Configuring a Server Certificate for the Product

You can configure a server certificate for your product.

1. Access Web Config and select the **Network Security** tab.
2. Under **SSL/TLS**, select **Certificate**.

You see a window like this:

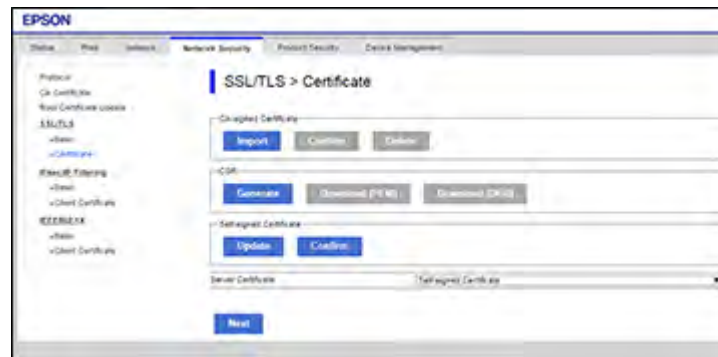

3. Select one of the following options:
 - **CA-signed Certificate:** Select **Import** if you have obtained a CA-signed certificate. Choose the file to import and click **OK**.
 - **Self-signed Certificate:** Select **Update** if you have not obtained a CA (Certificate Authority)-signed certificate and want the product to generate a self-signed certificate.
4. Click **Next**.

You see a confirmation message.
5. Click **OK**.

Parent topic: [Configuring SSL/TLS Communication](#)

Configuring IPsec/IP Filtering

Follow the instructions in these sections to configure IPsec/IP traffic filtering using Web Config.

[About IPsec/IP Filtering](#)

[Configuring Default IPsec/IP Filtering Policy](#)

[Configuring Group IPsec/IP Filtering Policies](#)

[IPsec/IP Filtering Policy Settings](#)

[IPsec/IP Filtering Configuration Examples](#)

[Configuring an IPsec/IP Filtering Certificate](#)

Parent topic: [Using Your Product on a Secure Network](#)

About IPsec/IP Filtering

You can filter traffic to the product over the network based on IP address, service, and port by configuring a default policy that applies to every user or group connecting to the product. For control of individual users or user groups, you can configure group policies.

Note: IPsec is supported only by computers running Windows Vista or later, or Windows Server 2008 or later.

Parent topic: [Configuring IPsec/IP Filtering](#)

Configuring Default IPsec/IP Filtering Policy

You can configure the default policy for IPsec/IP traffic filtering using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Under **IPsec/IP Filtering**, select **Basic**.

You see a window like this:



3. Select **Enable** to enable IPsec/IP filtering.
4. Select the filtering options you want to use for the default policy.
5. Click **Next**.
You see a confirmation message.
6. Click **OK**.

Configuring Group IPsec/IP Filtering Policies

1. Access Web Config and select the **Network Security** tab.
2. Under **IPsec/IP Filtering**, select **Basic**.
3. Click a tab number for the policy number you want to configure.

[illegible]

- You see a confirmation message.

- Parent topic:** [Configuring IPsec/IP Filtering](#)

IPsec/IP Filtering Policy Settings

Default Policy Settings

Setting	Options/Description
Access Control	Permit Access to permit IP packets to pass through Refuse Access to prevent IP packets from passing through IPsec to permit IPsec packets to pass through
IKE Version	Select the version of the Internet Key Exchange (IKE) protocol that matches your network environment
Authentication Method	Select an authentication method, or select Certificate if you have imported a CA-signed certificate
Pre-Shared Key	If necessary, enter a pre-shared key between 1 and 127 characters long
Confirm Pre-Shared Key	Confirm the pre-shared key you entered
ID Type	If you selected IKEv2 as the IKE Version setting, select the ID type from the list.
ID	If you selected IKEv2 as the IKE Version setting, enter the necessary ID information
Encapsulation	If you selected IPsec as the Access Control option, select one of these encapsulation modes: Transport Mode : if you are using the product on the same LAN; IP packets of layer 4 or later are encrypted Tunnel Mode : if you are using the product on an Internet-capable network, such as IPsec-VPN; the header and data of IP packets are encrypted
Remote Gateway(Tunnel Mode)	If you selected Tunnel Mode as the Encapsulation option, enter a gateway address between 1 and 39 characters long

Setting	Options/Description
Security Protocol	<p>If you selected IPsec as the Access Control option, select one of these security protocols:</p> <p>ESP: to ensure the integrity of authentication and data, and encrypt data</p> <p>AH: to ensure the integrity of authentication and data; if data encryption is prohibited, you can use IPsec</p>
Algorithm Settings	Select the encryption algorithm settings for the security protocol you selected

Group Policy Settings

Setting	Options/Description
Access Control	<p>Permit Access to permit IP packets to pass through</p> <p>Refuse Access to prevent IP packets from passing through</p> <p>IPsec to permit IPsec packets to pass through</p>
Local Address(Printer)	Select an IPv4 or IPv6 address that matches your network environment; if the IP address is assigned automatically, select Use auto-obtained IPv4 address ; if the IP address is assigned automatically by IPv6, the connection may be unavailable, so configure a static IPv6 address instead
Remote Address(Host)	Enter the device's IP address (between 0 and 43 characters long) to control access, or leave blank to control all addresses; if the IP address is assigned automatically, such as by DHCP, the connection may be unavailable, so configure a static address instead
Method of Choosing Port	Select the method you want to used for specifying ports
Service Name	If you selected Service Name as the Method of Choosing Port option, select a service name option here; see the next table for more information

Setting	Options/Description
Transport Protocol	<p>If you selected Port Number as the Method of Choosing Port option, select one of these encapsulation modes:</p> <p>Any Protocol</p> <p>TCP</p> <p>UDP</p> <p>ICMPv4</p> <p>See the Group Policy Guidelines table for more information.</p>
Local Port	<p>If you selected Port Number as the Method of Choosing Port option, and TCP or UDP for the Transport Protocol option, enter the port numbers that control receiving packets (up to 10 ports), separated by commas, for example 25,80,143,5220; leave this setting blank to control all ports; see the next table for more information</p>
Remote Port	<p>If you selected Port Number as the Method of Choosing Port option, and TCP or UDP for the Transport Protocol option, enter the port numbers that control sending packets (up to 10 ports), separated by commas, for example 25,80,143,5220; leave this setting blank to control all ports; see the next table for more information</p>
IKE Version	<p>Select IKEv1 or IKEv2 depending on the device that the product is connected to</p>
Authentication Method	<p>If you selected IPsec as the Access Control option, select an authentication method here</p>
Pre-Shared Key	<p>If you selected Pre-Shared Key as the Authentication Method option, enter a pre-shared key between 1 and 127 characters long here and in the Confirm Pre-Shared Key field</p>
ID Type	<p>If you selected IKEv2 as the IKE Version setting, select the ID type from the list</p>
ID	<p>If you selected IKEv2 as the IKE Version setting, enter the necessary ID information</p>

Setting	Options/Description
Encapsulation	<p>If you selected IPsec as the Access Control option, select one of these encapsulation modes:</p> <p>Transport Mode: if you are using the product on the same LAN; IP packets of layer 4 or later are encrypted</p> <p>Tunnel Mode: if you are using the product on an Internet-capable network, such as IPsec-VPN; the header and data of IP packets are encrypted</p>
Remote Gateway(Tunnel Mode)	If you selected Tunnel Mode as the Encapsulation option, enter a gateway address between 1 and 39 characters long
Security Protocol	<p>If you selected IPsec as the Access Control option, select one of these security protocols:</p> <p>ESP: to ensure the integrity of authentication and data, and encrypt data</p> <p>AH: to ensure the integrity of authentication and data; if data encryption is prohibited, you can use IPsec</p>
Algorithm Settings	Select the encryption algorithm settings for the security protocol you selected

Group Policy Guidelines

Service name	Protocol type	Local/Remote port number	Controls these operations
Any	—	—	All services
ENPC	UDP	3289/Any port	Searching for a product from applications such as printer or scanner drivers, or EpsonNet Config
SNMP	UDP	161/Any port	Acquiring and configuring MIB from applications such as printer or scanner drivers, or EpsonNet Config
LPR	TCP	515/Any port	Forwarding LPR data
RAW (Port9100)	TCP	9100/any port	Forwarding RAW data

Service name	Protocol type	Local/Remote port number	Controls these operations
IPP/IPPS	TCP	631/Any port	Forwarding data (IPP/IPPS printing)
WSD	TCP	Any port/5357	Controlling WSD
WS-Discovery	UDP	3702/Any port	Searching for a product from WSD
FTP Data (Local)	TCP	20/Any port	Forwarding FTP printing data to FTP server
FTP Control (Local)	TCP	21/Any port	Controlling FTP printing to FTP server
HTTP (Local)	TCP	80/Any port	Forwarding Web Config and WSD data to a HTTP or HTTPS server
HTTPS (Local)	TCP	443/Any port	
HTTP (Remote)	TCP	Any port/80	Communicating with Epson Connect, firmware update, and root certificate update on a HTTP or HTTPS client
HTTPS (Remote)	TCP	Any port/443	

Parent topic: [Configuring IPsec/IP Filtering](#)

IPsec/IP Filtering Configuration Examples

You can configure IPsec and IP filtering in a variety of ways, as shown in the examples here.

Receiving IPsec Packets Only

Use this example only for configuring a default policy.

- **IPsec/IP Filtering:** Enable
- **Access Control:** IPsec
- **Authentication Method:** Pre-Shared Key
- **Pre-Shared Key:** Enter a key up to 127 characters long

Receiving Printing Data and Printer Settings

Use this example to allow communication of printing data and printer settings from specified services.

Default policy:

- **IPsec/IP Filtering:** Enable
- **Access Control:** Refuse Access

Group policy:

- **Access Control: Permit Access**
- **Remote Address(Host):** Client IP address
- **Method of Choosing Port: Service Name**
- **Service Name:** Select **ENPC**, **SNMP**, **HTTP (Local)**, **HTTPS (Local)**, and **RAW (Port9100)**

Receiving Access from Only a Specified Address for Product Access

In these examples, the client will be able to access and configure the product in any policy configuration.

Default policy:

- **IPsec/IP Filtering: Enable**
- **Access Control: Refuse Access**

Group policy:

- **Access Control: Permit Access**
- **Remote Address (Host):** Administrator's client IP address


Parent topic: [Configuring IPsec/IP Filtering](#)

Configuring an IPsec/IP Filtering Certificate

You can configure a certificate for IPsec/IP traffic filtering using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Under **IPsec/IP Filtering**, select **Client Certificate**.

You see a window like this:

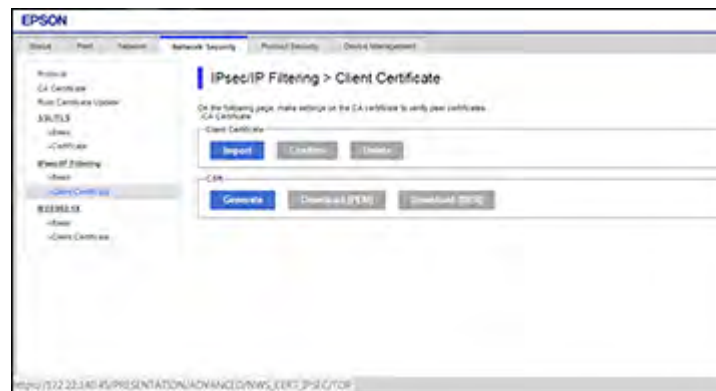

3. Do one of the following:
 - Click **Import** to add a new client certificate.
 - Select the certificate you want to use as the **Copy From** option and click **Copy**.
4. Click **OK**.

Parent topic: [Configuring IPsec/IP Filtering](#)

Related tasks


[Obtaining and Importing a CA-signed Certificate](#)

Configuring SNMPv3 Protocol Settings

If your product supports the SNMPv3 protocol, you can monitor and control access to your product using that protocol.

1. Access Web Config and select the **Network Security** tab.

You see a window like this:

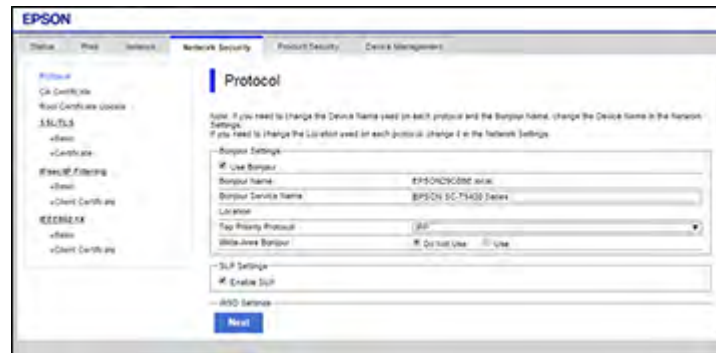

2. Scroll down and select the **Enable SNMPv3** checkbox to enable SNMPv3 settings.
3. Select the settings you want in SNMPv3 Settings section.
4. Click **Next**.

You see a confirmation message.

5. Click **OK**.

[SNMPv3 Settings](#)

Parent topic: [Using Your Product on a Secure Network](#)

SNMPv3 Settings

You can configure these SNMPv3 settings in Web Config.

Setting	Options/Description
User Name	Enter a user name from 1 to 32 characters long in ASCII
Authentication Settings	
Algorithm	Select the algorithm for authentication
Password	Enter a password from 8 to 32 characters long in ASCII
Confirm Password	Enter the authentication password again
Encryption Settings	
Algorithm	Select the algorithm for encryption
Password	Enter a password from 8 to 32 characters long in ASCII
Confirm Password	Enter the encryption password again
Context Name	Enter a context name from 1 to 32 characters long in ASCII

Parent topic: [Configuring SNMPv3 Protocol Settings](#)

Connecting the Product to an IEEE 802.1X Network

Follow the instructions in these sections to connect the product to an IEEE 802.1X network using Web Config.

[Configuring an IEEE 802.1X Network](#)

[IEEE 802.1X Network Settings](#)

[Configuring a Certificate for an IEEE 802.1X Network](#)

[IEEE 802.1X Network Status](#)


Parent topic: [Using Your Product on a Secure Network](#)

Configuring an IEEE 802.1X Network

If your product supports IEEE 802.1X, you can use it on a network with authentication provided by a RADIUS server with a hub as an authenticator using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Under **IEEE802.1X**, select **Basic**.

You see a window like this:

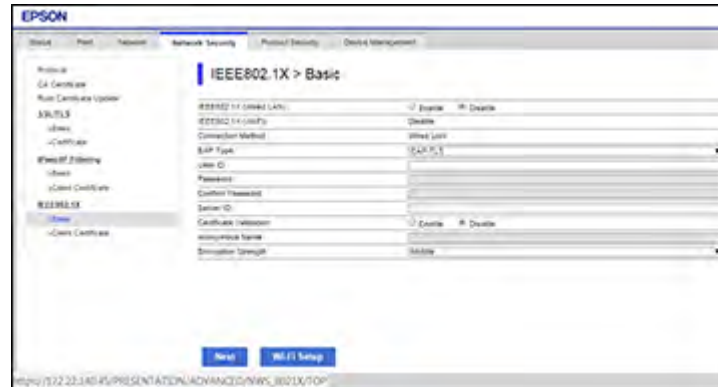

3. Select **Enable** as the **IEEE802.1X (Wired LAN)** setting.
4. To use the product on a Wi-Fi network, enable your product's Wi-Fi settings. See your product's *User's Guide* for instructions.

The status of the connection is shown as the **IEEE802.1X (Wi-Fi)** setting.

Note: You can share the network settings for Ethernet and Wi-Fi networking.

5. Select the IEEE 802.1X setting options you want to use.
6. Click **Next**.
7. Click **OK**.

Parent topic: [Connecting the Product to an IEEE 802.1X Network](#)

IEEE 802.1X Network Settings

You can configure these IEEE 802.1X network settings in Web Config.

Setting	Options/Description
IEEE802.1X (Wired LAN)	Enable or disable settings (IEEE802.1X > Basic)

Setting	Options/Description
IEEE802.1X (Wi-Fi)	Displays the IEEE802.1X (Wi-Fi) connection status
Connection Method	Displays the current network connection method
EAP Type	Select one of these authentication methods for connections between the product and a RADIUS server: EAP-TLS or PEAP-TLS : You must obtain and import a CA-signed certificate PEAP/MSCHAPv2 or EAP-TTLS : You must configure a password
User ID	Enter an ID between 1 and 128 ASCII characters for authentication on a RADIUS server
Password	Enter a password between 1 and 128 ASCII characters for authentication of the product. If you are using Windows as a RADIUS server, enter up to 127 ASCII characters.
Confirm Password	Enter the authentication password again
Server ID	Enter a server ID between 1 and 128 ASCII characters for authentication on a specified RADIUS server; server ID is verified in the subject/subjectAltName field of a server certificate sent from the RADIUS server
Certificate Validation	Select a valid certificate regardless of the authentication method; import the certificate using the CA Certificate option
Anonymous Name	If you selected EAP-TTLS , PEAP-TLS or PEAP/MSCHAPv2 as the Authentication Method setting, you can configure an anonymous name between 1 and 128 ASCII characters instead of a user ID for phase 1 of a PEAP authentication
Encryption Strength	Select one of the following encryption strengths: High for AES256/3DES Middle for AES256/3DES/AES128/RC4


Parent topic: [Connecting the Product to an IEEE 802.1X Network](#)

Configuring a Certificate for an IEEE 802.1X Network

If your product supports IEEE 802.1X, you can configure a certificate for the network using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Under **IEEE802.1X**, select **Client Certificate**.

You see a window like this:

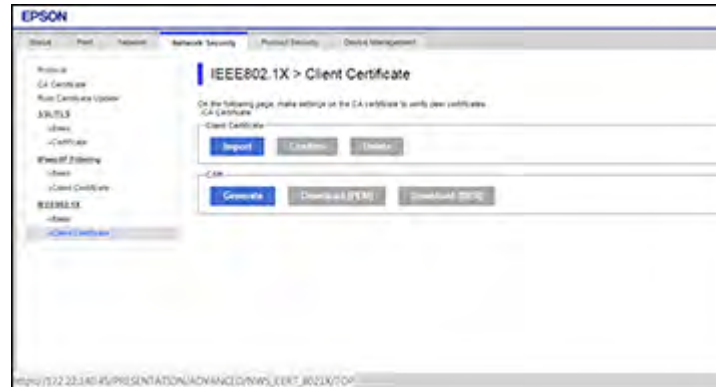

3. Do one of the following:
 - Click **Import** to add a new client certificate.
 - Select the certificate you want to use as the **Copy From** option and click **Copy**.
4. Click **OK**.

Parent topic: [Connecting the Product to an IEEE 802.1X Network](#)

IEEE 802.1X Network Status

You can check the status of the IEEE 802.1X network settings by printing a status sheet from your product. See the product's *User's Guide* for instructions on printing a network status sheet.

The network status sheet displays the information in this table for IEEE 802.1X networks.

Status ID	Status description
Disable	IEEE 802.1X is disabled
EAP Success	IEEE 802.1X authentication is confirmed and the network connection is available
Authenticating	IEEE 802.1X authentication in progress
Config Error	Authentication failed because the user ID was not set

Status ID	Status description
Client Certificate Error	Authentication failed because the client certificate is out of date
Timeout Error	Authentication failed because there is no answer from the RADIUS server and/or authenticator
User ID Error	Authentication failed because the product's user ID and/or certificate protocol is incorrect
Server ID Error	Authentication failed because the server ID on the server certificate and the server's ID do not match
Server Certificate Error	Authentication failed because the server certificate is out of date or the chain of the server certificate is incorrect
CA Certificate Error	Authentication failed because the CA certificate is incorrect, not imported, or out of date
EAP Failure	Authentication failed because the client certificate is incorrect (EAP-TLS or PEAP-TLS), or the user ID or password is incorrect (PEAP/MSCHAPv2 or EAP-TTLS)

Parent topic: [Connecting the Product to an IEEE 802.1X Network](#)

Using a Digital Certificate

Follow the instructions in these sections to configure and use digital certificates using Web Config.

[About Digital Certification](#)

[Obtaining and Importing a CA-signed Certificate](#)

[CSR Setup Settings](#)

[CSR Import Settings](#)

[Deleting a CA-signed Certificate](#)

[Updating a Self-signed Certificate](#)

[Importing a CA Certificate](#)

[Deleting a CA Certificate](#)

Parent topic: [Using Your Product on a Secure Network](#)

About Digital Certification

You can configure the following digital certificates for your network using Web Config:

CA-signed Certificate

You can ensure secure communications using a CA-signed certificate for each security feature. The certificates must be signed by and obtained from a CA (Certificate Authority).

CA Certificate

A CA certificate indicates that a third party has verified the identity of a server. You need to obtain a CA certificate for server authentication from a CA that issues it.

Self-signed Certificate

A self-signed certificate is issued and signed by the product itself. You can use the certificate for only SSL/TLS communication, however security is unreliable and you may see a security alert in the browser during use.

Parent topic: [Using a Digital Certificate](#)

Obtaining and Importing a CA-signed Certificate

You can obtain a CA-signed certificate by creating a CSR (Certificate Signing Request) using Web Config and submitting it to a certificate authority. The CSR created in Web Config is in PEM/DER format. You can import one CSR created from Web Config at a time.

1. Access Web Config and select the **Network Security** tab.
2. Under one of the following network security options, select the corresponding certificate:
 - **SSL/TLS** and **Certificate**
 - **IPsec/IP Filtering** and **Client Certificate**
 - **IEEE802.1X** and **Client Certificate**
3. In the CSR section, select **Generate**.

You see a window like this:

The screenshot shows the 'Epson Configurator' application window. The title bar reads 'EPSON Configurator'. The interface includes a top navigation bar with tabs: 'Status', 'Print', 'Network', 'Network Security', 'Protocol Security', and 'Device Management'. The 'Network Security' tab is active.

In the left sidebar, under the 'Network' section, the following options are listed:

- Protocol
 - CA Certificate
- Root Certificate Updater
- SSL/TLS
 - General
 - Certificate
- Wi-Fi Protected Setup
 - General
 - Connect Certificate
- SECURITY
 - General
 - Connect Certificate

The main content area is titled 'SSL/TLS > Certificate'. It contains a form with the following fields:

- Key Length: A dropdown menu showing '2048 (2048, 3072, 4096)'.
- Common Name: A text field containing 'EPSONCORP.EPSONCORP.tok.172.22.140.81'.
- Organization: An empty text field.
- Organizational Unit: An empty text field.
- City: An empty text field.
- State/Province: An empty text field.
- Country: An empty text field.

At the bottom of the window, there are two buttons: 'OK' and 'Back'.

4. Select the CSR setting options you want to use.
5. Click **OK**.

You see a completion message.

6. Select the **Network Security** tab again, and select your network security option and the corresponding certificate.
7. In the CSR section, click the **Download** option that matches the format specified by your certificate authority to download the CSR.


Caution: Do not generate another CSR or you may not be able to import a CA-signed certificate.

8. Submit the CSR to the certificate authority following the format guidelines provided by that authority.
9. Save the issued CA-signed certificate to a computer connected to the product.

Before proceeding, make sure the time and date settings are correct on your product. See the product's *User's Guide* for instructions.

10. Select the **Network Security** tab again, and select your network security option and the corresponding certificate.
11. In the CA-signed Certificate section, click **Import**.

You see a window like this:

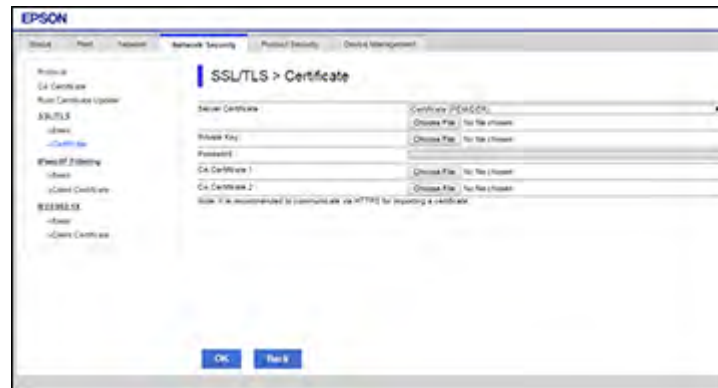

12. Select the format of the certificate as the **Server Certificate** setting.
13. Select the certificate import settings as necessary for the format and the source from which you obtained it.

14. Click **OK**.

You see a confirmation message.

15. Click **Confirm** to verify the certificate information.

Parent topic: [Using a Digital Certificate](#)

CSR Setup Settings

You can select these settings when setting up a CSR in Web Config.

Note: The available key length and abbreviations vary by certificate authority, so follow the rules of that authority when entering information in the CSR.

Setting	Options/Description
Key Length	Select a key length for the CSR
Common Name	Enter a name or static IP address from 1 to 128 characters long; for example, Reception printer or https://10.152.12.225 . You can add up to 5 IPv4 addresses, IPv6 addresses, host names, or FQDNs by separating them with commas.
Organization, Organizational Unit, Locality, State/Province	Enter information in each field as necessary, from 0 to 64 characters long in ASCII; separate any multiple names with commas
Country	Enter a two-digit country code number as specified by the ISO-3166 standard

Parent topic: [Using a Digital Certificate](#)

CSR Import Settings

You can configure these settings when importing a CSR in Web Config.

Note: The import setting requirements vary by certificate format and how you obtained the certificate.

Certificate format	Setting descriptions
PEM/DER format obtained from Web Config	Private Key: Do not configure because the product contains a private key Password: Do not configure CA Certificate 1/CA Certificate 2: Optional
PEM/DER format obtained from a computer	Private Key: Configure a private key Password: Do not configure CA Certificate 1/CA Certificate 2: Optional
PKCS#12 format obtained from a computer	Private Key: Do not configure Password: Optional CA Certificate 1/CA Certificate 2: Do not configure

Parent topic: [Using a Digital Certificate](#)

Deleting a CA-signed Certificate

You can delete an imported CA-signed certificate with Web Config when the certificate expires or if you have no more need for an encrypted connection.

Note: If you obtained a CA-signed certificate from Web Config, you cannot import a deleted certificate; you must obtain and import a new certificate.

1. Access Web Config and select the **Network Security** tab.
2. Under one of the following network security options, select the corresponding certificate:
 - **SSL/TLS** and **Certificate**
 - **IPsec/IP Filtering** and **Client Certificate**
 - **IEEE802.1X** and **Client Certificate**
3. Click **Delete**.
You see a completion message.
4. Click **OK**.


Parent topic: [Using a Digital Certificate](#)

Updating a Self-signed Certificate

If your product supports the HTTPS server feature, you can update a self-signed certificate using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Under **SSL/TLS**, select **Certificate**.
3. Click **Update**.

You see a window like this:

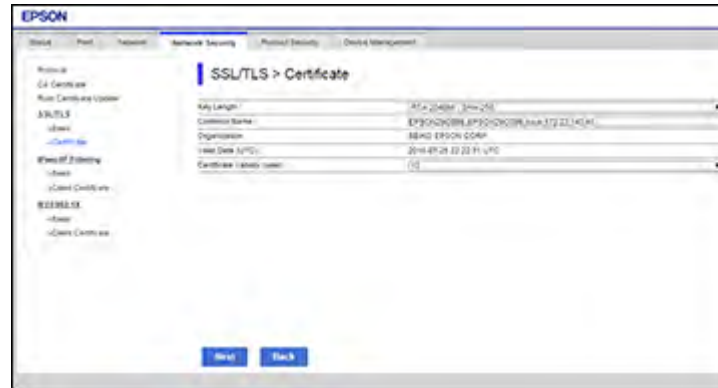

4. Enter an identifier for your product from 1 to 128 characters long in the **Common Name** field.

Note: You can add up to 5 IPv4 addresses, IPv6 addresses, host names, or FQDNs; separated by commas. The first value is assigned to the Common Name field, and the rest are added to the Alias field of the certificate subject. You cannot enter a space before or after a comma.

5. Select a validity period for the certificate as the **Certificate Validity (year)** setting.
6. Click **Next**.

You see a completion message.

- Click **OK**.
- Click **Confirm** to verify the certificate information.

Parent topic: [Using a Digital Certificate](#)

Importing a CA Certificate

You can import a CA certificate using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Select **CA Certificate**.
3. Select **Import**.
4. Select the CA certificate you want to import.



5. Click **OK**.

When you see the **CA Certificate** page and the imported certificate is displayed, the import is finished.

Parent topic: [Using a Digital Certificate](#)

Deleting a CA Certificate

You can delete an imported CA certificate with Web Config when the certificate expires or if you have no more need for an encrypted connection.

1. Access Web Config and select the **Network Security** tab.

2. Select **CA Certificate**.



3. Locate the certificate you want to remove and click the **Delete** button next to it.
4. Click **OK** to confirm the deletion.
5. Click **Reboot Network**, and then check that the deleted CA Certificate is not listed on the updated screen.

Parent topic: [Using a Digital Certificate](#)

Configuring Protocols in Web Config

You can enable or disable protocols using Web Config.

1. Access Web Config and select the **Network Security** tab.
2. Select or deselect the checkbox next to the service name to enable or disable a protocol.
3. Configure any other available protocol settings.
4. Click **Next**.
5. Click **OK**.

After the protocols restart, the changes are applied.

Protocol Settings

Parent topic: [Using Your Product on a Secure Network](#)

Protocol Settings

Protocols

Name	Description
Bonjour	Bonjour is used to search for devices
SLP	SLP is used for network searching in EpsonNet Config
WSD	Add WSD devices, or print from the WSD port
LLTD	Displays the product on the Windows network map
LLMNR	Use name resolution without NetBIOS even if you cannot use DNS
LPR	Print from to the LPR port
RAW(Port9100)	Print from the RAW port (Port 9100)
IPP	Print over the Internet
FTP	Print over FTP
SNMPv1/v2c	Remotely set up and monitor your product
SNMPv3	Remotely set up and monitor your product with the SNMPv3 protocol

Bonjour Settings

Setting	Options/Description
Use Bonjour	Search for or use devices through Bonjour
Bonjour Name	Displays the Bonjour name
Bonjour Service Name	Displays the Bonjour service name
Location	Displays the Bonjour location name
Top Priority Protocol	Selects the protocol that is the top priority for Bonjour printing
Wide-Area Bonjour	Enables the Wide-Area Bonjour protocol; register all products on the DNS server to locate them over the segment

SLP Settings

Setting	Options/Description
Enable SLP	Enable the SLP function to use network searching in EpsonNet Config

WSD Settings

Setting	Options/Description
Enable WSD	Enable adding devices using WSD, and printing from the WSD port (if you do not want this product to search for devices, disable this setting and disable Enable IPP)
Printing Timeout (sec)	Enter the communication timeout value for WSD printing between 3 and 3,600 seconds
Device Name	Displays the WSD device name
Location	Displays the WSD location name

LLTD Settings

Setting	Options/Description
Enable LLTD	Enable LLTD to display the product in the Windows network map
Device Name	Displays the LLTD device name

LLMNR Settings

Setting	Options/Description
Enable LLMNR	Enable LLMNR to use name resolution without NetBIOS, even if you cannot use DNS

LPR Settings

Setting	Options/Description
Allow LPR Port Printing	Allow printing from the LPR port

Setting	Options/Description
Printing Timeout (sec)	Enter the timeout value for LPR printing between 0 and 3,600 seconds

RAW (Port9100) Settings

Setting	Options/Description
Allow RAW (Port9100) Printing	Allow printing from the RAW port (Port 9100)
Printing Timeout (sec)	Enter the timeout value for RAW port (Port 9100) printing between 0 and 3,600 seconds

IPP Settings

Setting	Options/Description
Enable IPP	Enable IPP communication for products that support IPP are displayed
Allow Non-secure Communication	Allow the printer to communicate without any security measures (IPP)
Communication Timeout (sec)	Enter the timeout value for IPP printing between 0 and 3,600 seconds
URL(Network)	Displays IPP URLs (http and https) when the product is connected using wired LAN or Wi-Fi (the URL is a combined value of the product's IP address, Port number, and IPP printer name)
URL(Wi-Fi Direct)	Displays IPP URLs (http and https) when the product is connected using Wi-Fi Direct (the URL is a combined value of the product's IP address, Port number, and IPP printer name)
Printer Name	Displays the IPP printer name
Location	Displays the IPP location

FTP Settings

Setting	Options/Description
Enable FTP Server	Enable FTP printing for products that support FTP printing

Setting	Options/Description
Communication Timeout (sec)	Enter the timeout value for FTP communication between 0 and 3,600 seconds

SNMPv1/v2c Settings

Setting	Options/Description
Enable SNMPv1/v2c	Enable SNMPv1/v2c for products that support SNMPv3
Access Authority	Set the access authority when SNMPv1/v2c is enabled to Read Only or Read/Write
Community Name (Read Only)	Enter 0 to 32 ASCII characters
Community Name (Read/Write)	Enter 0 to 32 ASCII characters
Allow access from Epson tools	Set whether to allow writing from Epson tools such as Epson Device Admin

SNMPv3 Settings

Setting	Options/Description
Enable SNMPv3	Enable SNMPv3 for products that support SNMPv3
User Name	Enter 1 to 32 characters
Authentication Settings	Select an algorithm and set a password for authentication
Encryption Settings	Select an algorithm and set a password for encryption
Context Name	Enter 1 to 32 characters

Parent topic: [Configuring Protocols in Web Config](#)

Related references

[SNMPv3 Settings](#)

Using EpsonNet Config Network Configuration Software

Follow the instructions in these sections to configure your product's administrator network settings using the EpsonNet Config software.

With Windows, you can configure network settings in a batch operation. See the EpsonNet Config help utility for instructions.

Note: Before you can configure system administration settings, connect the product to a network. See the product's *User's Guide* for instructions.

[Installing EpsonNet Config](#)

[Configuring a Product IP Address Using EpsonNet Config](#)

Installing EpsonNet Config

To install EpsonNet Config, download the software from the product's support page at epson.com/support (U.S.), epson.ca/support (Canada), or latin.epson.com/support (Caribbean) and follow the on-screen instructions.

Parent topic: [Using EpsonNet Config Network Configuration Software](#)

Configuring a Product IP Address Using EpsonNet Config

You can configure the product's IP address using EpsonNet Config.

1. Turn on the product.
2. Connect the product to a network using an Ethernet cable.
3. Do one of the following to start EpsonNet Config:
 - **Windows 11:** Click , then search for **EpsonNet Config** and select it.
 - **Windows 10:** Click  > **All Apps** > **EpsonNet** > **EpsonNet Config**.
 - **Windows 8.x:** Navigate to the **Apps** screen and select **EpsonNet** > **EpsonNet Config**.
 - **Windows (other versions):** Click  or **Start** and select **All Programs** or **Programs**. Select **EpsonNet** > **EpsonNet Config**.
 - **Mac:** Open the **Applications** folder, open the **Epson Software** folder, and select **EpsonNet** > **EpsonNet Config** > **EpsonNet Config**.


After a few moments, the program displays the connected products.

4. Double-click the product you are configuring.

Note: If several products of the same model are connected, you can identify them by their MAC address.

5. Enter the current administrator password if necessary, and click **OK**.
6. From the menu on the left, under **TCP/IP**, select **Basic**.

You see a window like this:

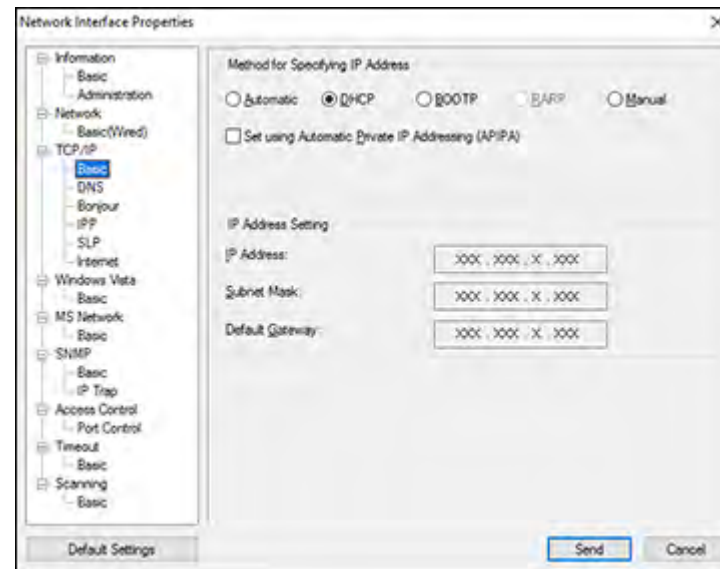

7. Select **Manual**.
8. Enter the product's **IP address**, **Subnet Mask**, and **Default Gateway** settings in the fields provided.

Note: To connect the product to a secure network, enter a static IP address. You can also configure the DNS settings by selecting **DNS**, and enter proxy settings by selecting **Internet** from the **TCP/IP** menu.

9. Select **Send**.

10. Enter the current administrator password if necessary, and click **OK**.

Parent topic: [Using EpsonNet Config Network Configuration Software](#)

Using Epson Device Admin Configuration Software

With Windows, you can discover and monitor remote devices, and configure network settings in a batch operation. See the Epson Device Admin help for instructions.

To install Epson Device Admin, download the software from the support page at epson.com/support (U.S.), epson.ca/support (Canada), or latin.epson.com/support (Caribbean) and follow the on-screen instructions.

Solving Problems

Check these sections for solutions to problems you may have with the network configuration software.

[Solving Network Software Usage Problems](#)

[Solving Network Security Problems](#)

[Solving Digital Certificate Problems](#)

[Where to Get Help](#)

Solving Network Software Usage Problems

Check these sections if you have problems using the network software.

[Cannot Access Web Config](#)

[The "Certificate has expired" Message Appears](#)

["The name of the security certificate does not match" Message Appears](#)

[Model Name or IP Address Not Displayed in EpsonNet Config](#)

Parent topic: [Solving Problems](#)

Cannot Access Web Config

If you cannot access Web Config on your product, try these solutions:

- Make sure your product is turned on and connected to your network using the correct IP address. Verify the connection using your product control panel or print a network status sheet. See your product's *User's Guide* for instructions.
- If you selected **High** as the **Encryption Strength** setting in Web Config, your browser must support AES (256-bit) or 3DES (168-bit) encryption. Check your browser's encryption support or select a different **Encryption Strength** option.
- If you are using a proxy server with your product, configure the browser's proxy settings as follows:
 - **Windows 11:** Click , then search for **Proxy Settings**. Scroll down and set **Use a proxy server** to **On**.
 - **Windows 10:** Click  > **Settings** > **Network and Internet** > **Proxy**. Scroll down and set **Use a proxy server** to **On**. Select **Don't use proxy server for local (Intranet) addresses**.
 - **Windows 8.x:** Navigate to the **Apps** screen and select **PC Settings** > **Network** > **Proxy**. Scroll down and set **Use a proxy server** to **On**. Select **Don't use proxy server for local (Intranet) addresses**.

- **Windows (other versions):** Click  or **Start** and select **Control Panel > Network and Internet > Internet Options > Connections > LAN settings > Proxy server > Bypass proxy server for local addresses**.
- **Mac:** Select **System Preferences > Network > Advanced > Proxies**. Register the local address under **Bypass proxy settings for these Hosts & Domains**. For example, 192.168.1.*: Local address 192.168.1.XXX, subnet mask 255.255.255.0.

Parent topic: [Solving Network Software Usage Problems](#)

The "Certificate has expired" Message Appears

If the "The certificate has expired" message appears when you access Web Config using SSL communication (HTTPS), the certificate is out of date. Make sure that the product date and time are configured correctly, and obtain a new certificate.

Parent topic: [Solving Network Software Usage Problems](#)

"The name of the security certificate does not match" Message Appears

If a message beginning with "The name of the security certificate does not match . . ." appears when you access Web Config using SSL communication (HTTPS), the product's IP address on the CSR or self-signed certificate does not match what you entered in the browser. Change the IP address you entered for the **Common Name** setting, and obtain and import a certificate again, or change the product name.

Parent topic: [Solving Network Software Usage Problems](#)

Model Name or IP Address Not Displayed in EpsonNet Config

If the product model name and/or IP address is not displayed in EpsonNet Config, try these solutions:

- If you selected the block, cancel, or shut down option on a Windows security or firewall screen, the IP address and model name cannot display in EpsonNet Config. Register EpsonNet config as an exception in your firewall or security software, or close the security software and try running EpsonNet Config again.
- The operation may have timed out. Select **Tools**, select **Options**, select **Timeout**, and increase the time option for the **Communication Error** setting. This may cause EpsonNet Config to run slower, however.

Parent topic: [Solving Network Software Usage Problems](#)

Solving Network Security Problems

Check these sections if you have problems using the network security features.

[Pre-Shared Key was Forgotten](#)
[Cannot Communicate with the Product Using IPsec Communication](#)
[Communication was Working, but Stopped](#)
[Cannot Create the Secure IPP Printing Port](#)
[Cannot Connect After Configuring IPsec/IP Filtering](#)
[Cannot Access the Product After Configuring IEEE 802.1X](#)
Parent topic: [Solving Problems](#)

Pre-Shared Key was Forgotten

If you forget a pre-shared key, change the key using Web Config for the default or group policy.

Parent topic: [Solving Network Security Problems](#)

Cannot Communicate with the Product Using IPsec Communication

Make sure your computer is using one of these supported algorithms for communicating with the product:

Security method	Supported algorithms
IKE encryption algorithm	AES-CBC-128, AES-CBC-192, AES-CBC-256, AES-GCM-128*, AES-GCM-192*, AES-GCM-256*, 3DES
IKE authentication algorithm	SHA-1, SHA-256, SHA-384, SHA-512, MD5
IKE key exchange algorithm	DH Group1, DH Group2, DH Group5, DH Group14, DH Group15, DH Group16, DH Group17, DH Group18, DH Group19, DH Group20, DH Group21, DH Group22, DH Group23, DH Group24, DH Group25, DH Group26, DH Group27*, DH Group28*, DH Group29*, DH Group30*
ESP encryption algorithm	AES-CBC-128, AES-CBC-192, AES-CBC-256, AES-GCM-128, AES-GCM-192, AES-GCM-256, 3DES
ESP authentication algorithm	SHA-1, SHA-256, SHA-384, SHA-512, MD5
AH authentication algorithm	

* Available for IKEv2 only

Parent topic: [Solving Network Security Problems](#)

Communication was Working, but Stopped

If network communication was working, but suddenly stopped, the product's and/or computer's IP address may have changed or is invalid. Try these solutions:

- Disable IPsec using the product control panel.
- If DHCP is out of date, or the IPv6 address is out of date or was not obtained, you may not be able to find the IP address registered in Web Config.
- If that does not solve the problem, enter a static IP address using Web Config.

Parent topic: [Solving Network Security Problems](#)

Cannot Create the Secure IPP Printing Port

If you cannot create the secure IPP printing port, try these solutions:

- Make sure you specified the correct server certificate for SSL/TLS communication using Web Config.
- If you are using a CA certificate, make sure it is imported to the computer that is accessing the product.

Parent topic: [Solving Network Security Problems](#)

Cannot Connect After Configuring IPsec/IP Filtering

The set value may be incorrect. Disable IPsec/IP filtering from the product's control panel. Connect from the computer and configure the IPsec/IP Filtering settings again.

To disable IPsec/IP filtering from the control panel, select  Menu > **General Settings** > **Network Settings** > **Advanced** > **Disable IPsec/IP Filtering** > **Start Setup**. When a completion message is displayed, select **Close**.

Parent topic: [Solving Network Security Problems](#)

Cannot Access the Product After Configuring IEEE 802.1X

If you cannot access the product after configuring it for IEEE 802.1X, disable IEEE 802.1X and Wi-Fi using the product control panel. Then connect the product to a computer and configure IEEE 802.1X using Web Config again.

To disable IEEE802.1X from the control panel, select  Menu > **General Settings** > **Network Settings** > **Advanced** > **Disable IEEE802.1X** > **Start Setup**. When a completion message is displayed, select **Close**.

Parent topic: [Solving Network Security Problems](#)

Solving Digital Certificate Problems

Check these sections if you have problems using a digital certificate.

[Digital Certificate Warning Messages](#)

[Cannot Import a Digital Certificate](#)

[Cannot Update a Certificate or Create a CSR](#)

[Deleted a CA-signed Certificate](#)

Parent topic: [Solving Problems](#)

Digital Certificate Warning Messages

If you see a warning message when using a digital certificate, check for solutions in this table.

Message	Solution
Enter a Server Certificate.	Select a certificate file and click Import .
CA Certificate 1 is not entered.	Import CA certificate 1 before importing additional certificates.
Invalid value below.	Remove any unsupported characters in the file path and password.
Invalid date and time.	Set the date and time on the product using Web Config, EpsonNet Config, or the product control panel.
Invalid password	Enter the password that matches the password set for the CA certificate.
Invalid file	Try the following: <ul style="list-style-type: none">• Import only certificate files in X509 format sent by a trusted certificate authority.• Make sure the file size is 5KB or less and is not corrupted or fabricated.• Make sure the chain in the certificate is valid; check the certificate authority's website.

Message	Solution
Cannot use the Server Certificates that include more than three CA certificates.	Import certificate files in PKCS#12 format that contains one or two CA certificates, or convert each certificate to PRM format and import them again.
The certificate has expired. Check if the certificate is valid, or check the date and time on your printer.	Make sure the product time and date are set correctly and, if the certificate is out of date, obtain and import a new certificate.
Private key is required.	<p>Do one of the following to pair a private key with the certificate:</p> <ul style="list-style-type: none"> • For PEM/DER format certificates obtained from a CSR using a computer, specify the private key file. • For PKCS#12 format certificates obtained from a CSR using a computer, create a file containing the private key. <p>If you re-imported a PEM/DER format certificate obtained from a CSR using Web Config, you can only import it once. You must obtain and import a new certificate.</p>
Setup failed.	Make sure the computer and product are connected, and the certificate file is not corrupted, then import the certificate file again.

Parent topic: [Solving Digital Certificate Problems](#)

Cannot Import a Digital Certificate

If you cannot import a digital certificate, try these solutions:

- Make sure the CA-signed certificate and the CSR have the same information. If they do not match, import the certificate to a device that matches the information or use the CSR to obtain the CA-signed certificate again.
- Make sure the CA-signed certificate file size is 5KB or less.
- Make sure you are entering the correct password.

Parent topic: [Solving Digital Certificate Problems](#)

Cannot Update a Certificate or Create a CSR

If you cannot update a self-signed certificate or create a CSR for a CA-signed certificate, try these solutions:

- Make sure that you entered a **Common Name** setting in Web Config.
- Make sure the **Common Name** setting does not contain unsupported characters or is divided by a comma. Correct the setting and update the certificate again.

Parent topic: [Solving Digital Certificate Problems](#)

Deleted a CA-signed Certificate

If you accidentally deleted a CA-signed certificate, try these solutions:

- If you retained a backup file, import the CA-signed certificate again.
- If you obtained the certificate using a CSR created in Web Config, you cannot import a deleted certificate. Create a new CSR and obtain a new certificate.

Parent topic: [Solving Digital Certificate Problems](#)

Where to Get Help

If you need to contact Epson for technical support services, use the following support options.

Internet Support

Visit Epson's support website at epson.com/support (U.S.), epson.ca/support (Canada), or latin.epson.com/support (Caribbean) and select your product for solutions to common problems. You can download drivers and documentation, get FAQs and troubleshooting advice, or e-mail Epson with your questions.

Speak to a Support Representative

Before you call Epson for support, please have the following information ready:

- Product name
- Product serial number (located on a label on the product)
- Proof of purchase (such as a store receipt) and date of purchase
- Computer configuration
- Description of the problem

Then see your product's *User's Guide* for contact information.

Parent topic: [Solving Problems](#)

Notices

Check these sections for important notices.

[Trademarks](#)

[Copyright Notice](#)

Trademarks

EPSON® is a registered trademark, the EPSON logo is a registered logomark, and Epson Connect™ is a trademark of Seiko Epson Corporation.

Mac and OS X are trademarks of Apple Inc., registered in the U.S. and other countries.

Microsoft, Windows, Windows Server, and Windows Vista are trademarks of the Microsoft group of companies.

Wi-Fi Direct® is a registered trademark of Wi-Fi Alliance®.

General Notice: Other product names used herein are for identification purposes only and may be trademarks of their respective owners. Epson disclaims any and all rights in those marks.

The EPSON logo is displayed in a bold, blue, sans-serif font. The letters are closely spaced, and a registered trademark symbol (®) is located at the top right of the letter 'N'.

Parent topic: [Notices](#)

Copyright Notice

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Seiko Epson Corporation. The information contained herein is designed only for use with this Epson product. Epson is not responsible for any use of this information as applied to other products.

Neither Seiko Epson Corporation nor its affiliates shall be liable to the purchaser of this product or third parties for damages, losses, costs, or expenses incurred by purchaser or third parties as a result of: accident, misuse, or abuse of this product or unauthorized modifications, repairs, or alterations to this product, or (excluding the U.S.) failure to strictly comply with Seiko Epson Corporation's operating and maintenance instructions.

Seiko Epson Corporation shall not be liable for any damages or problems arising from the use of any options or any consumable products other than those designated as Original Epson Products or Epson Approved Products by Seiko Epson Corporation.

Seiko Epson Corporation shall not be held liable for any damage resulting from electromagnetic interference that occurs from the use of any interface cables other than those designated as Epson approved Products by Seiko Epson Corporation.

This information is subject to change without notice.

[Copyright Attribution](#)

Parent topic: [Notices](#)

Copyright Attribution

© 2023 Epson America, Inc.

12/23

CPD-64336

Parent topic: [Copyright Notice](#)