

[→ Product Website](#)[→ Video Playlist](#)[→ Experience in AR](#)

From photographers who make films to videographers who take photographs, right through to time-lapse photography and cinemagraphs – the borders between visual content are becoming visibly blurred, while also growing ever closer at the same time. Videographers want to see their material in 4K UHD resolution, while photographers wish to preview the full sharpness of their printed images on the monitor. The ColorEdge CS2740 from EIZO fulfils both these requirements down to a tee. A graphics monitor's most important task is to display exactly what is stored in the camera. That's why each ColorEdge CS2740 is individually measured and optimally configured in the factory. The ColorEdge CS2740's hardware can be calibrated in just 90 seconds (measured using a MacBook Pro and EX4) without loss, which means that it consistently retains its factory-set perfection across its entire service life. A powerful notebook is often the only computer available. Thanks to its four USB downstream ports and its USB-C upstream port, hard disks, mice, keyboards and other peripheral devices such can be connected directly to the CS2740. With a single USB-C cable on the CS2740, the computer can be integrated into the complete desktop workflow and is supplied with up to 60 watts of power. Plus, the monitor also has HDMI and DisplayPort inputs. This makes the ColorEdge CS2740 the central hub for discerning creative professionals.

- ✓ 27-inch wide gamut LCD with 3840 x 2160 pixels (4K-UHD) delivers ultra-sharp details
- ✓ Wide gamut covering 99% of the Adobe RGB colour gamut
- ✓ Precise hardware calibration of brightness, white balance and gamma
- ✓ Digital Uniformity Equalizer for top-rate luminance distribution and colour purity
- ✓ Colour precision with 16-bit look-up-table and up to 10-bit colour reproduction
- ✓ USB-C (DisplayPort signal channel and power supply up to 60 watts), DisplayPort and HDMI inputs
- ✓ USB hub with 2 5Gbps (USB 3) and 2 USB 2 downstream ports
- ✓ EIZO microchip ensures precise, consistent and lasting colour display
- ✓ Recommended optional accessories: Measurement sensor for hardware calibration and monitor hood
- ✓ 5-year warranty for highest investment security

Precision and color accuracy


High-contrast, bright and crisp screen

CRYSTAL-CLEAR DISPLAY


4K UHD resolution

Thanks to the resolution of 3840 x 2160 (4K UHD), the CS2740 has an enormous pixel density of 164 ppi. Visible monitor pixels are guaranteed to be a thing of the past and even the monitor display gives a very meaningful impression of the subsequent print resolution. The IPS panel has a maximum brightness of 350 cd/m² and achieves a contrast ratio of 1000:1. Films can be assessed, edited and graded with the CS2740 in full 4K UHD resolution. The LCD module allows a viewing angle of 178 degrees. This keeps colour tones and contrasts stable in the user's viewing cone.


[Read here to find out what other advantages a high-resolution 4K monitor offers.](#)



4K-UHD (3840 x 2160)



WQHD (2560 x 1440)



Full HD (1920 x 1080)

FOR SATURATED COLORS

Wide gamut color space

To be able to use the entire colour spectrum of modern cameras, you need a monitor with the largest possible colour space. Only then is it possible to visually assess and edit the saturated hues contained in the file. That is why the IPS panel of the ColorEdge CS2740 covers, for

example, the wide AdobeRGB photo gamut as well as the CMYK print gamut ISO-Coated V2 to more than 99 %. This means that the full colour spectrum of modern cameras is represented unaltered and without gaps. And a precise simulation of the print result in the softproof view is also guaranteed.


[Read here why an AdobeRGB monitor is essential for professional graphics work.](#)



REALISTIC IMAGE DISPLAY

Outstanding image quality


The monitor has an impressive top resolution (3840 x 2160 (4K UHD)), a very good contrast ratio of 1000:1 and a brightness of 350 cd/m². For example, you can edit graphics and images down to the pixel. As an added benefit, text contours are clear and precise. The LCD panel with the IPS (Wide Gamut) panel allows for a viewing angle of 178 degrees. Ensuring that hue and contrast remain stable for the viewer.

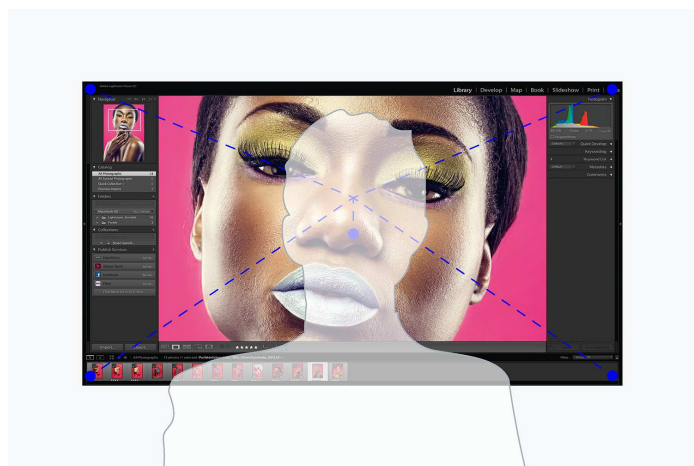


SMOOTH TRANSITIONS AND GRADIENTS

16-bit LUT and 10-bit mode


The LUT (look-up-table) on the CS2740 employs internal calculations with 16 bits for an extremely high colour depth and outputs the signals with up to 10 bits. This provides billions of hues for calculating the precise monitor display, effectively preventing display errors caused by the monitor such as banding or clipping, which can result in tonal breaks in gradients or unnecessary colours in greyscale. Even fine nuances and structures in dark or highly saturated areas of the image can be displayed in a differentiated and detailed manner.



10 bit (LUT: 16 bit)



8 bit (LUT: 16 bit)



8 bit (LUT: 8 bit)


READY TO USE RIGHT OUT OF THE BOX

Perfect settings right from the factory

Every ColorEdge CS2740 is individually measured and optimally configured in the factory, enabling it to be used immediately after it has been unboxed. To this end, the gamma curves for the red, green and blue channels are closely checked and corrected, if necessary. This unique EIZO factory calibration enables the user to start using the monitor with the preset gamut range right out

of the box. This painstaking calibration at the factory ensures that the user can quickly recalibrate the monitor if needed using ColorNavigator.

[Read all about monitor calibration here.](#)

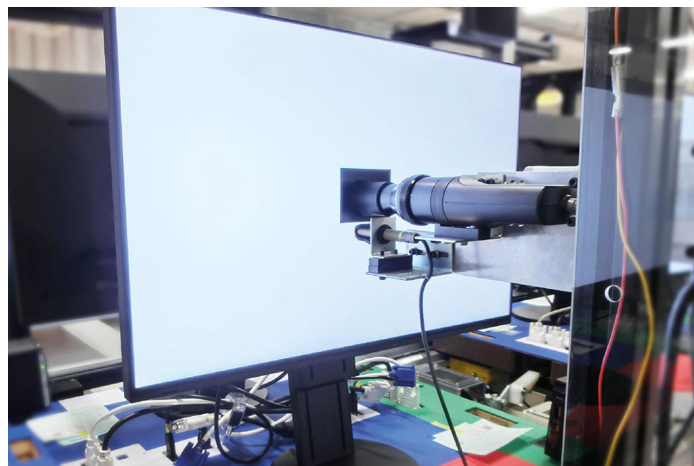

HOMOGENEOUS IMAGE DISPLAY

Digital Uniformity Equalizer

Each individual monitor panel is precisely measured over the entire surface at the EIZO factory. Any inhomogeneities in brightness and unnecessary colour are detected and removed. This process (Digital Uniformity Equalizer) guarantees that identical colours always look the same across the entire surface of the monitor, no matter where they are displayed. Only in this way is precise image processing and retouching possible.



With DUE




Without DUE

FAST, EASY AND LOSSLESS

Hardware calibration without any compromises

It is essential that the monitor is regularly calibrated to ensure that it always displays the same file in the same way over its entire service life. To do so, all ColorEdge monitors employ lossless hardware calibration. Unlike software calibration, which always involves the risk of loss of display quality, hardware calibration not only creates an adjustment profile for the graphics board but also calibrates the monitor's LUT (look-up-table).

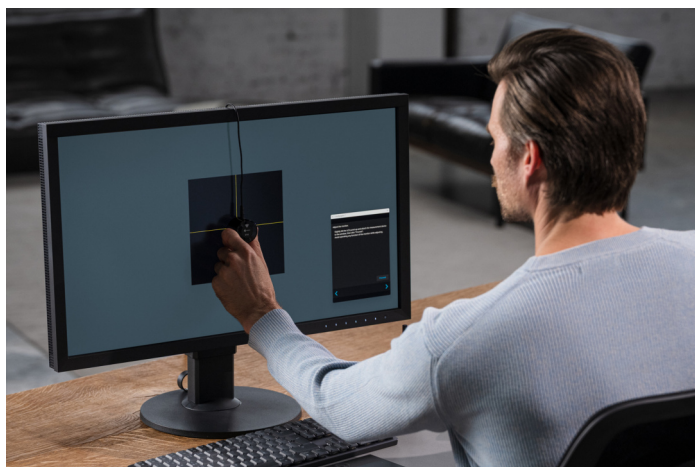

COLORNAVIGATOR


EIZO software for fast calibration and printing

Each monitor ages and changes its display properties. This is why graphics monitors, which require an absolutely constant image display over the entire service life, must be regularly calibrated and adjusted. With the free calibration software ColorNavigator from EIZO, the ColorEdge CS2740 can be adjusted within 90 seconds (measured with a MacBook Pro and EX5), easily and without any losses. This is to ensure that the same image still looks the same on the monitor five years from now.

[More information on the EIZO ColorNavigator.](#)

The free Quick Color Match software helps users, even without in-depth expertise in colour management, to see on the monitor how their images will look when printed on their Canon or Epson inkjet printer at home. In this way, the images can be optimised for the special properties of the selected photo paper even before printing, which helps users avoid expensive misprints.


[More information on Quick Color Match.](#)

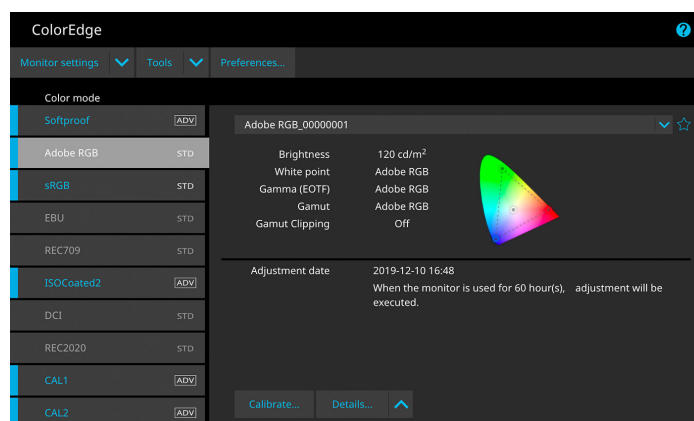

REALISTIC HDR DISPLAY

HLG and PQ gamma

EIZO offers optional HLG and PQ curves for the CS2740 as part of the calibration with ColorNavigator. The optimized gamma curves make images appear more realistic compared to SDR, just as the human eye perceives the real world.



HDR




SDR

FOR OPTIMIZED COLOR REPRODUCTION

EIZO microchip

The CS2740 has a high-quality microchip whose features EIZO has developed specifically for the special requirements of color-accurate work. This microchip is the brain of a ColorEdge as it guarantees the precise, uniform and constant image display that is the hallmark of EIZO.

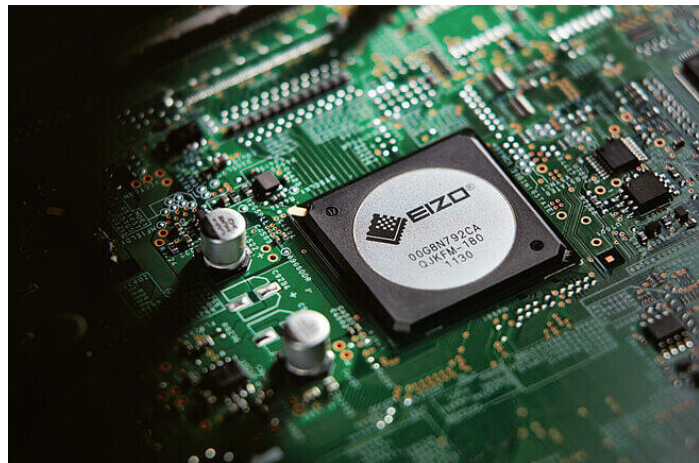


Variety of ports Best connectivity

MODERN AND FUTURE-PROOF

USB-C: one cable for everything

Image signal, USB data transfer as well as power supply with up to 60 W, all this and more can be realised with a single USB-C cable. This makes the ColorEdge CS2740 the central dock of the graphic workflow. Peripheral devices such as a mouse, keyboard or printer can be connected directly to the USB-A ports. Mobile devices such as laptops or tablets can even be charged via the USB-C cable with up to 60 W via the USB-C cable. In this way, a laptop and CS2740 can be turned into a fully-fledged desktop workstation with a quick flick of the wrist.

[Read more about USB-C in the EIZO Academy.](#)

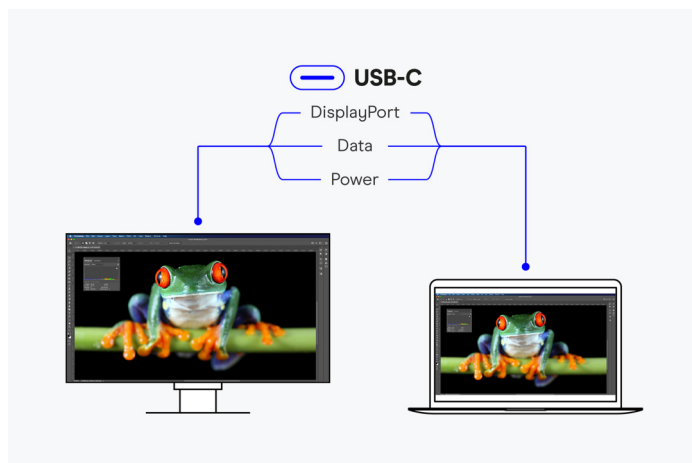

CONVENIENTLY CONNECTED

One monitor, many ports

The CS2740 supports a wide range of video formats via USB-C, HDMI and DisplayPort interfaces. This means that the monitor can not only be integrated into PC-based workflows but can also be used with HDMI feeders.

[Learn more about the connectivity of EIZO monitors.](#)



TWO PCS, ONE CONTROL

KVM switch

It has never been easier to operate different PCs with a single mouse and keyboard. Thanks to the USB upstream ports, the CS2740 has an integrated KVM (Keyboard Video Mouse) switch. The monitor automatically links the webcam, microphone, speakers, mouse and keyboard to the currently active source computer. This means, for example, that a desktop PC and laptop or business and private PC can each be operated on the same combination of monitor USB devices. This ensures uninterrupted working and a tidy workspace.

[Discover all the advantages of the KVM switch here.](#)

Ergonomics

Working in a relaxed manner

FOR THE SAKE OF THE EYES

Flicker free

The monitor is flicker-free at every brightness setting. This is great for users, as their eyes will not tire as quickly, allowing them to work in front of the screen for longer periods of time without fatigue.

MORE IMAGE, LESS REFLECTION

Optimal anti-glare coating

The CS2740 offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the CS2740 effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the monitor, without having to sit in a forced position to prevent glare.


FLEXIBLE ADJUSTMENT

Ergonomic stand


Our screens offer continuous height adjustment. Depending on the model, they can even be lowered to the base plate of the stand. This guarantees the best possible ergonomics, regardless of whether the user is sitting or standing in front of the screen. You can also swi-

vel, rotate and tilt the monitor base to the position that is most comfortable for your posture.


The CS2740 can also be rotated into the portrait format, which is a great advantage for tethered shoots of people in the portrait mode, for example.




Height
155 mm



Tilt
Between 5° forwards and 35° backwards



Swivel
344°



Rotation
clockwise

QUICK ACCESS TO POPULAR FUNCTIONS

Customised key assignment

Depending on the model, up to three sensor buttons on the front can be assigned functions from the on-screen menu. The advantage: you have direct access to frequently used features.

Sustainability

Environmentally and socially conscious production

DURABLE, FAIR, AND RESOURCE-EFFICIENT

Responsibility in Development, Supply Chain, and Production

The CS2740 is designed for sustainable and long-lasting use—typically well beyond the warranty period. Replacement parts remain available long after production ends, and the product’s repairability helps protect the environment. During development, emphasis was placed on minimal resource use, high-quality components, and meticulous production. Because one thing is clear: durable products make a significant contribution to environmental protection.

Manufacturing is carried out in a socially responsible manner and without child or forced labor; carefully selected suppliers are committed to the same standards, particularly regarding the handling of conflict minerals.

Manufactured in our own facility, which has an ISO 14001- and ISO 50001-certified environmental and energy management system, the production process includes measures to reduce waste, emissions, and energy consumption.

We publish a detailed annual report on these measures.

SUSTAINABLE DEVELOPMENT GOALS

Our Contribution to SDGs

As part of its sustainability initiatives, EIZO is contributing towards the United Nations’ Sustainable Development Goals (SDGs).

[Learn more about EIZO’s sustainability initiatives here.](#)

Environmentally Conscious Product Development

ColorEdge promotes the use of recycled materials and low-impact components, while maintaining the high performance demanded for creative work. The monitors are optimized for energy efficiency, contributing to lower greenhouse gas (GHG) emissions.

EIZO also collects and recycles used products to further minimize environmental impact. We strive to promote efficient and circular resource use across every stage of the product lifecycle - from parts and materials procurement to manufacturing, transportation, user experience, and end-of-life disposal.

All production sites at EIZO’s headquarters in Japan operate on 100% renewable energy.

Color Precision for Creative Excellence

ColorEdge provides a high-precision color management solution for creative environments, powered by advanced display technology and consistent color control. Unified color management across the entire production workflow streamlines color communication across creative teams and studios, helping to reduce time and costs associated with rework due to color inconsistencies.

[Learn more.](#)



Warranty

Highest investment security

DURABLE THANKS TO HIGH-END QUALITY

Five-year warranty

EIZO grants a five-year warranty. This is possible thanks to the highly developed production process based on a simple principle of success: sophisticated and innovative technology, made from high-end materials.



Technical Data

GENERAL		FEATURES & OPERATION	
Item no.	CS2740	USB-C docking	✓
Case color	Black	KVM switch	✓
Areas of application	Photography, Video & Graphics	Hardware calibration of brightness and luminance characteristics	✓
Product line	ColorEdge	Preset color/greyscale modes	AdobeRGB, sRGB, additional memory spaces through calibration
Areas of application	Photography, image editing and retouching, Video Editing, Post Production and Colour Grading, Design, creation and illustration, Textile and fashion industry	Digital Uniformity Equalizer (homogeneity correction)	✓
Specific system requirements	None, compatible with most computers and operating systems including macOS and Windows	No flickering	✓
EAN	4995047055624	I/P conversion	✓
SCREEN		HDCP Decoder	✓
Screen size [in inches]	26,9	Gamut Clipping	✓
Screen size [in cm]	68,4	Automatic signal input recognition	✓
Format	16:9	On-screen menu languages	de, en, fr, es, it, se
Viewable image size (width x height) [in mm]	596,2 x 335,4	Adjustment options	Brightness, Contrast, Color temperature/White point, Gamma, Colour tone, Color saturation, Resolution, Scaling, Color matrix YUV/RGB, OSD language, Signal input, DUE priority
Ideal and recommended resolution	3840 x 2160 (4K UHD)	Button Guide	✓
Pixel pitch [in mm]	0,155 x 0,155	Integrated power unit	✓
Pixel density [in ppi]	164	ELECTRICAL DATA	
Supported resolutions	3840 x 2160 (4K UHD), 2560 x 1600, 2560 x 1440, 2560 x 1440 (@ 30 Hz), 1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480, 1080p (@ 60 Hz), 1080i (@ 60 Hz), 1080p (@ 50 Hz), 1080i (@ 50 Hz), 1080p (@ 30/25/24 Hz), 720p (@ 60 Hz), 720p (@ 50 Hz), 576p (@ 60 Hz), 576p (@ 50 Hz), 480i (@ 60 Hz)	Frequency	USB-C/DisplayPort: 25.0 - 137 kHz, 23 - 61 Hz; HDMI: 15 - 135 kHz, 23 - 61 Hz
Panel technology	IPS (Wide Gamut)	Power consumption (typical) [in watts]	36
Max. viewing angle horizontal [in °]	178	Maximum Power Consumption [in watts]	168 (at maximum brightness and operation of all signal and USB ports as well as full charging power)
Max. viewing angle vertical [in °]	178	Max. Power consumption in stand-by mode [in watts]	1
Number of colors or greyscale	1.07 billion colors (USB-C, 10-bit), 1.07 billion colors (HDMI, 10 Bit), 1.07 billion colors (DisplayPort, 10 Bit)	Power consumption with power switch off [in watts]	0
Color palette/look-up table	278 trillion color tones / 16 Bit	Energy efficiency class	G
Max. color space (typical)	DCI P3 (>90%), AdobeRGB (>99%), ISO Coated V2 (>99%), Rec709 (100%), EBU (100%), SMPTE-C (100%), sRGB (100%)	Energy consumption/1000h [in kWh]	38
Color space presets	sRGB, AdobeRGB	Power supply	AC 100-240V, 50/60Hz
Max. brightness (typical) [in cd/m²]	350	Max. USB-C Power Delivery [in Watt]	60
Max. dark room contrast (typical)	1000:1	DIMENSIONS & WEIGHT	
Response time grey-grey alternation (typical) [in ms]	10	Dimensions (incl. stand) (width x height x depth) [in mm]	638 x 404-559 x 265
Backlight	LED	Weight (incl. stand) [in kg]	10.3
CONNECTIONS		Dimensions (without stand) (width x height x depth) [in mm]	638 x 378,2 x 75
Signal inputs	USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (Deep Color, HDCP 1.4/2.2)	Dimension drawing (PDF)	Dimension drawing (PDF)
USB specification	USB 5Gbps (USB 3)	Rotatability of the stand [in °]	344
USB upstream ports	1 x type C (DisplayPort Alt Mode, 60 W max.), 1 x type B	Tiltability forwards/backwards [in °]	5 / 35
USB downstream ports	4 x Typ A (2 x 5Gbps (USB 3), 2 x USB 2)	Pivot between portrait / landscape	clockwise
Graphic signal	USB-C, DisplayPort, HDMI (RGB, YUV)	Height adjustment range [in mm]	155
		Hole spacing	100 x 100

CERTIFICATION & STANDARDS

Certification	CE, CB, TÜV/GS, TÜV/Ergonomics (including ISO 9241-307), RCM, cTÜVus, FCC-B, CAN ICES-3 (B), TÜV/S, PSE, VCCI-B, RoHS, WEEE, China RoHS, CCC, EAC
---------------	---

SOFTWARE & ACCESSORIES

Accompanying software and other accessories are available for download	ColorNavigator, ColorNavigator Network
Other box contents	USB/signal cable (USB-C - USB-C), USB cable (Type A - Type B), Signal cable DisplayPort - DisplayPort, Power cord, Manual via download, Quick guide
Accessories	CH2710 (Monitor hood for EIZO ColorEdge monitors), EX5 (External calibration sensor for ColorEdge monitors in conjunction with the ColorNavigator 7 color management software.), PM200-K (DisplayPort cable to transfer digital video and audio signals), HH200PR-K (HDMI (High Definition Multimedia Interface) cable)

WARRANTY

Warranty periode	5 years for unit and LCD module up to 30,000 operating hours, whichever comes first.
Included warranty	Zero pixel defects guarantee; no fully illuminated sub-pixels (sub-pixels ISO 9241-307) for six months from date of purchase.



**Experience the
CS2740 in AR now!**

Find your EIZO contact:
EIZO Europe GmbH
Belgrader Straße 2
41069 Mönchengladbach
Phone: +49 2161 8210-0
www.eizo.eu