


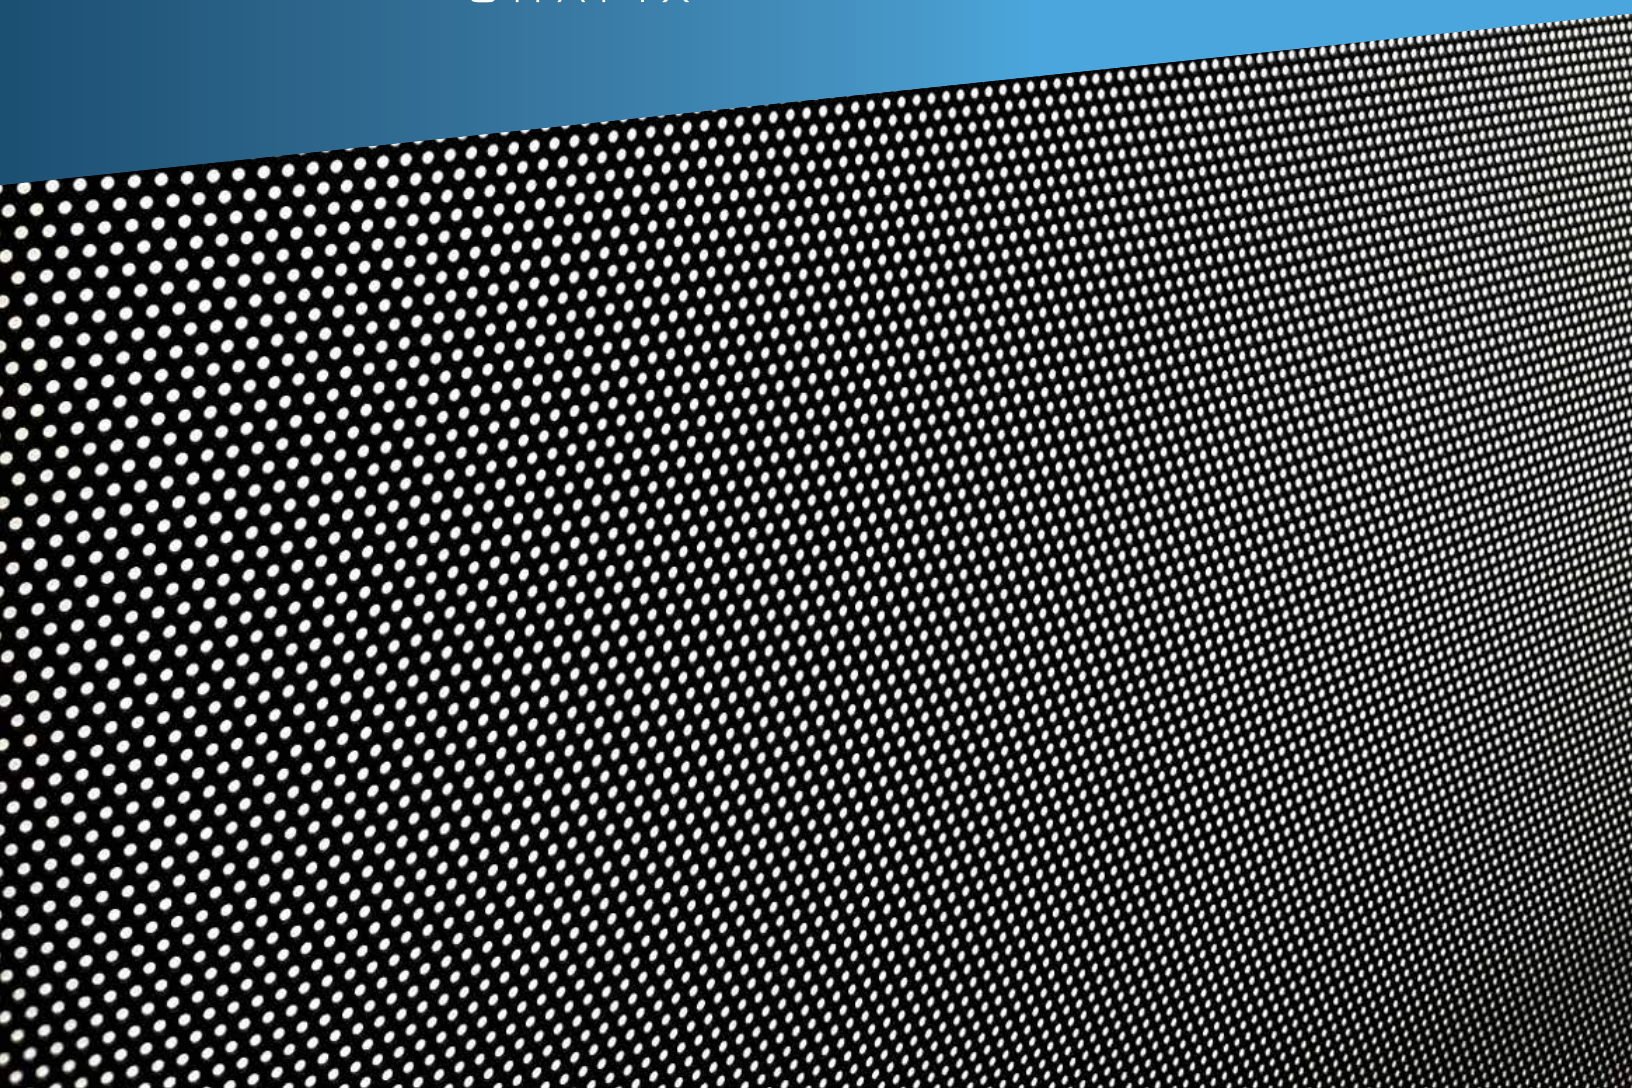

panoRama Eclipse

A black/ black self-adhesive, perforated, one-way daytime privacy window film with a clear removable adhesive.

An alternative to window tint to shade sunlight and better manage interior temperatures.

80/20 film/open ratio film with black face and back ideal for daytime privacy and security applications in schools, offices, and RV's.

APPLICATIONS

- Daytime Privacy & Security Applications
- Educational & RV Windows
- Entertainment Events as an Alternative to Step & Repeat Banners

panoRama Eclipse

MATERIAL

Face Film	Black Perforated PVC- Printable
Back Side	Black with Clear Adhesive
Adhesive	Removable Semi-Permanent Clear
Liner	Universal Paper Liner – 6 mil (150µ +/-10µ)
Film Thickness	5.7 mil (145µ +/-10µ)
Open Area	20% Open Area
FR Certification	ASTM E84

DURABILITY

Interior	Up to 3 Years
Exterior	Up To 2 Years - Vertical Exposure Under North American Midwest Conditions
Environment	Humidity & Solvent Resistance – Good
Shelf Life	1 Year
Storage Requirements	Store at 59°F to 68°F (+15°C to +20°C) and Relative Humidity between 45% to 65%
Repositionable	No

APPLICATION/REMOVAL

Application Temp	+50°F to +86°F (+10°C to +30°C)
Service Temp	+0°F to +122°F (-17°C to +50°C)
Removability	Clean Removal with No Adhesive Residue, up to 6 Months - Adhesion May Increase over Time
Removal Temp	+50°F (+10°C) or Greater
Exclusions	NOT to Be Applied to Fresh Paint, Polycarbonate, and Some PVC (No Exhaustive List Available)

Surface must be clean and dry. Prevent contact with solvent or ammonia-based cleaners. For best results, clean installation surface with a mild detergent and water and dry thoroughly. ALWAYS clean and dry glass surface prior to application. For full installation and removal recommendations, please refer to "panoRama Exterior Mount Perforated Window Film Application & Removal Guide."

**For critical substrates and all surfaces, please test PRIOR to application.*

Rev 7/2026



Printing Methods

- Digital – Solvent, Eco-Solvent, UV, & Latex
- Requires White Ink if Printing



Material Sizes

- 54" x 164'



Advantages

- Print White Ink or Use a Base for Color Graphics
- Universal Liner for All Printing Methods
- Laminate with panoRama Cast or panoRama Protect for Maximum Protection and Durability
- Great Removability (Up to 6 Months without Residue)

→ For more information

For additional product information, performance, and warranty guidelines please contact Continental Grafix USA, Inc.

1-704-872-2216 • www.cgxusa.com